

Barriers must be inspected frequently to identify and repair worn, corroded or cracked parts. This is especially important when the barrier is frequently required to reopen before the closing cycle is completed.


The barrier and the fence must be cleaned of all ice accumulation or of snow to avoid the load increase.

The fence must not be modified without authorization of Automatic Systems America Inc.

The barrier must be put out of service if cracks appear on any part, including the cement base or if the safety of the people is compromised.

X _____

Date Approved _____

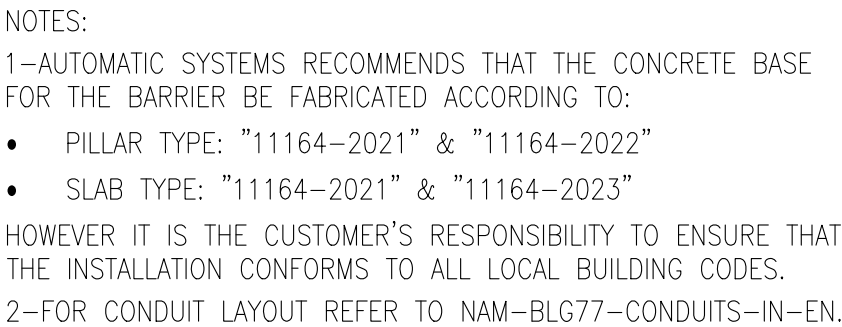

B	2025/08/15	OPERATOR V2 & NOTE 1	OHL
REV	DATE	MODIFICATIONS/CHANGES	PAR/BY

REV
B