

## Technical datasheet


NAM-SlimEPR-DS-EN-B

Access controlled...  
Future secured

## //SlimLane

### Options

1. For convenient reader integration, we offer 2 location; on the side and on the top.
2. Slot for Barcode cards.

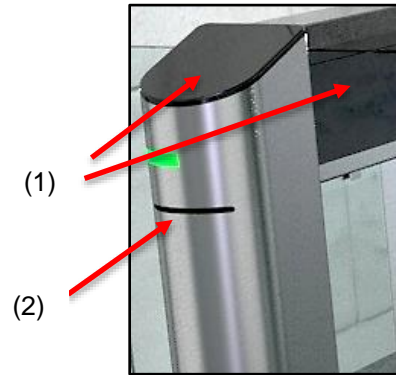

3. Increased space for multiple integrations:
  - a. Industrial PC integration.
  - b. Elevator display screen.  
Angled housing for elevator display.  
\* Max. dimensions (\*can change depending of the shape of the display):  
4 x 7 x 1.5 in (102 x 178 x 38 mm)

The SlimLane EPR swing door security entrance lane offers a high bidirectional throughput and uncompromising security.

With its transparent, elegant design, the SlimLane EPR is designed to integrate perfectly into any architectural environment while allowing the integration of multiple peripherals.

Equipped with a high processing capacity and an exclusive detection system, the SlimLane EPR guarantees accurate user tracking and prevents any unauthorized access.

The SlimLane EPR is a modular product that can be installed as a single lane or in a multi-lane array.

The SlimLane EPR option is only available on short cabinets.

For standard information, please refer to the SlimLane Datasheet (NAM-SLIM 940-DS-EN).



## Technical datasheet

NAM-SlimEPR-DS-EN-B

Access controlled...  
Future secured

### STANDARD DIMENSIONS (inches / mm) without & with angled housing for elevator display

