

Access controlled...
Future secured



The **Smart Touch** product provides a simple and elegant remote management solution, via an Ethernet network, able to control one or two arrays of access control equipment.

It comes in the form of a 10" PC panel with touch screen that provides a clear representation of the installation in just a few views, and offers the following features:

- Addition or removal of equipment
- Choice of operating mode in both directions of passage (free or controlled).
- Ability to grant one or more passage authorizations to a specific lane.
- Activation of evacuation mode for the entire site.
- Display of alarms and technical faults.
- Management of the number of people allowed to enter and leave the building via a "counter" on all pedestrian devices.
- The connection of a loudspeaker to replicate the audible alarms of the pedestrian product.
- Optional Ethernet to HDMI converter available for use with customer supplied display.


The application can only be accessed with username and password. There are two access levels according to the type of user (administrator or operator).

GENERAL DESCRIPTION


1. 10" color touch screen equipped with an Android™ operating system and the **Smart Touch** application.
2. Modern design and inclined support for ease of use.

CONNECTION VIA ETHERNET NETWORK

In a typical installation, the **Smart Touch**, via its RJ45 Ethernet Port, and each of the devices, are connected to a switch. Each having their own specific IP address.

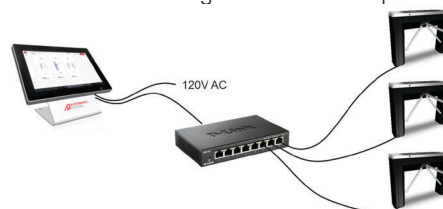

Ethernet cabling.

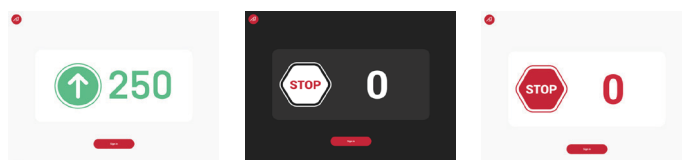

Real-time status of people counting feature.

STANDARD TECHNICAL CHARACTERISTICS

Power supply	12V/DC via standard single-phase adapter, 120VAC, 60Hz
Communication interface	Ethernet
Jack-Headset socket	3.5mm stereo headphone/ micro output
Available software languages	French, English, Spanish.
Screen	10-inch color, touch screen
AS compatible models	TriLane, FirstLane, SlimLane, SlimLite, AccessLane, BL229, ParkPlus (BL15), BL67X, BL4X
Limitation	Pedestrian products: Maximum 2 arrays, 10 lanes per array Vehicle products: Maximum 2 sets, 10 gates per set.


EXTERNAL DIMENSIONS

Width	10-1/4 in [260 mm]
Height	7-1/2 in [193 mm]
Depth	5-3/4 in [146 mm]


WORK TO BE PROVIDED BY OTHERS (NOT SUPPLIED)

- Performing the electrical interconnection and connection to the power.
- Performing the connections to the access control system.
- Integrating additional peripherals such as loud speaker for audible alarms and display for people counting.

EXAMPLE OF SCREEN

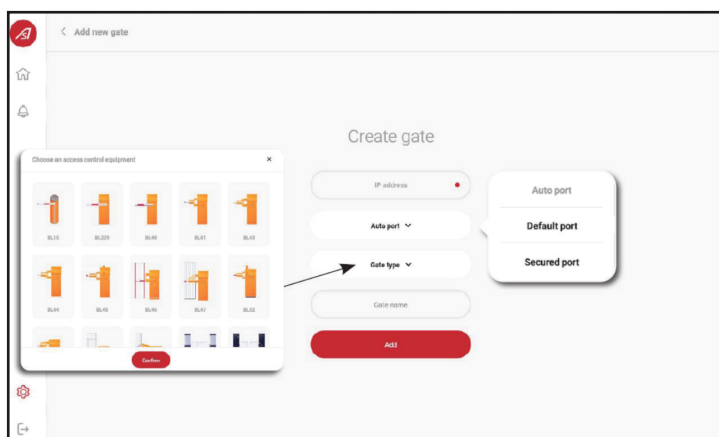

Creating a new device in an array

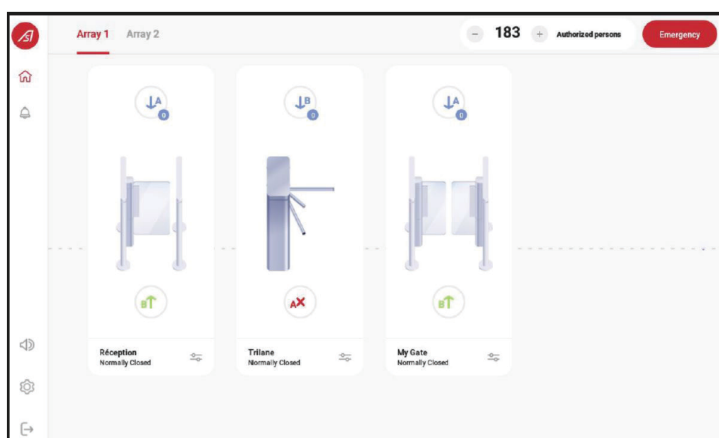

Counter on "Array display" screen