

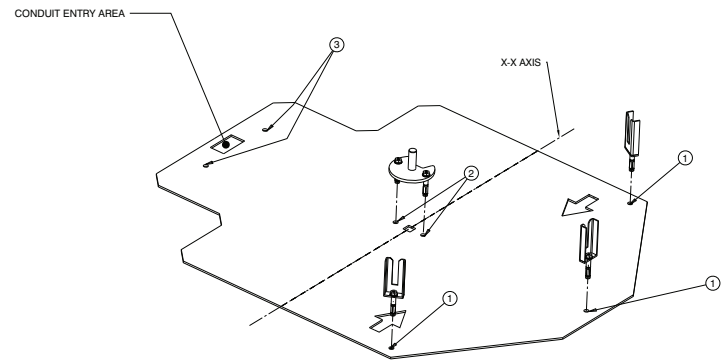
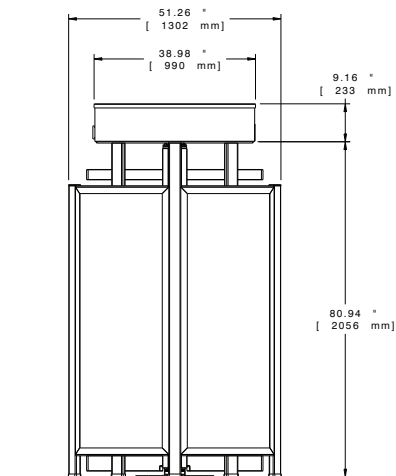
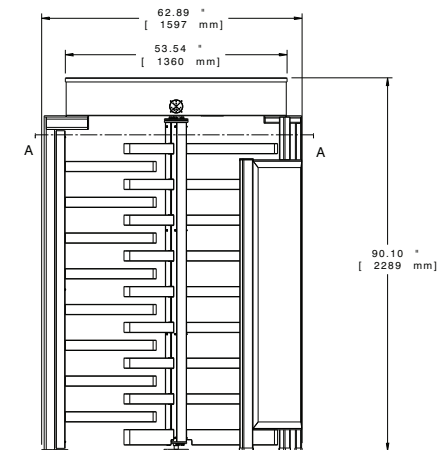
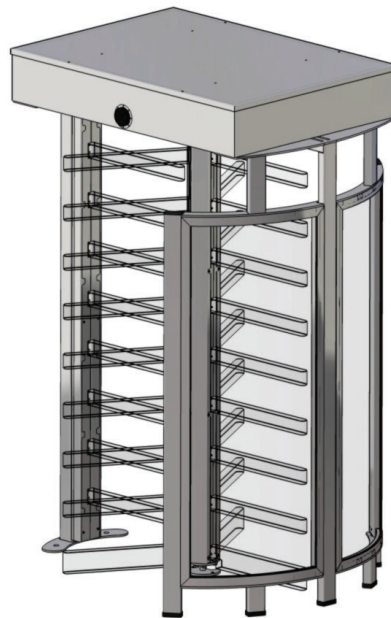


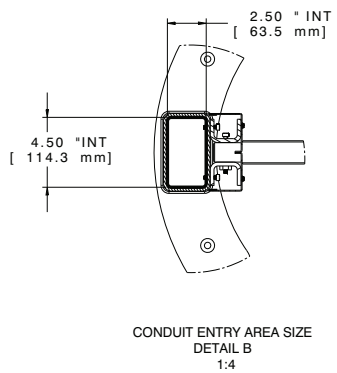

DRILLING TEMPLATE POSITIONING (ITEM 0/1924/128)
3D VIEW

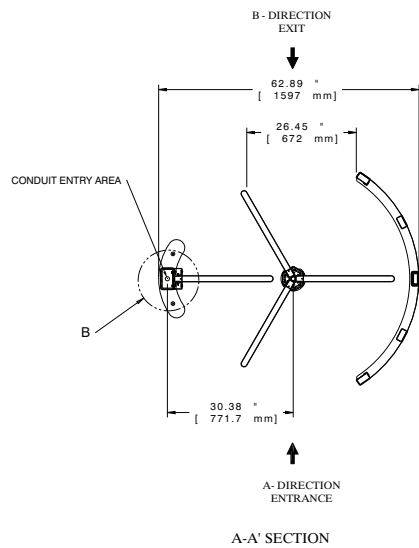

- Position the template with regard to the entry direction
- 1 cable entry points is available.
- Mark points ① and ②, as well as X-X axis
- Rotate the template around X-X axis
- Position the template according to points
- Mark points

POWER SUPPLY : Single phase 120V - 2x 12 AWG cable (as per local electrical code)

CONTROL CABLE : Control cable with shield

ALL CABLES TO BE SUPPLIED WITH A MINIMUM 4 METERS FREE TAIL

[illegible]